

ASSY. 28F1495-11 R.H. SHOWN HERE-10 L.H. OPP.


ASSY. 28F1495-13 R.H. SHOWN HERE-L.H. OPP.

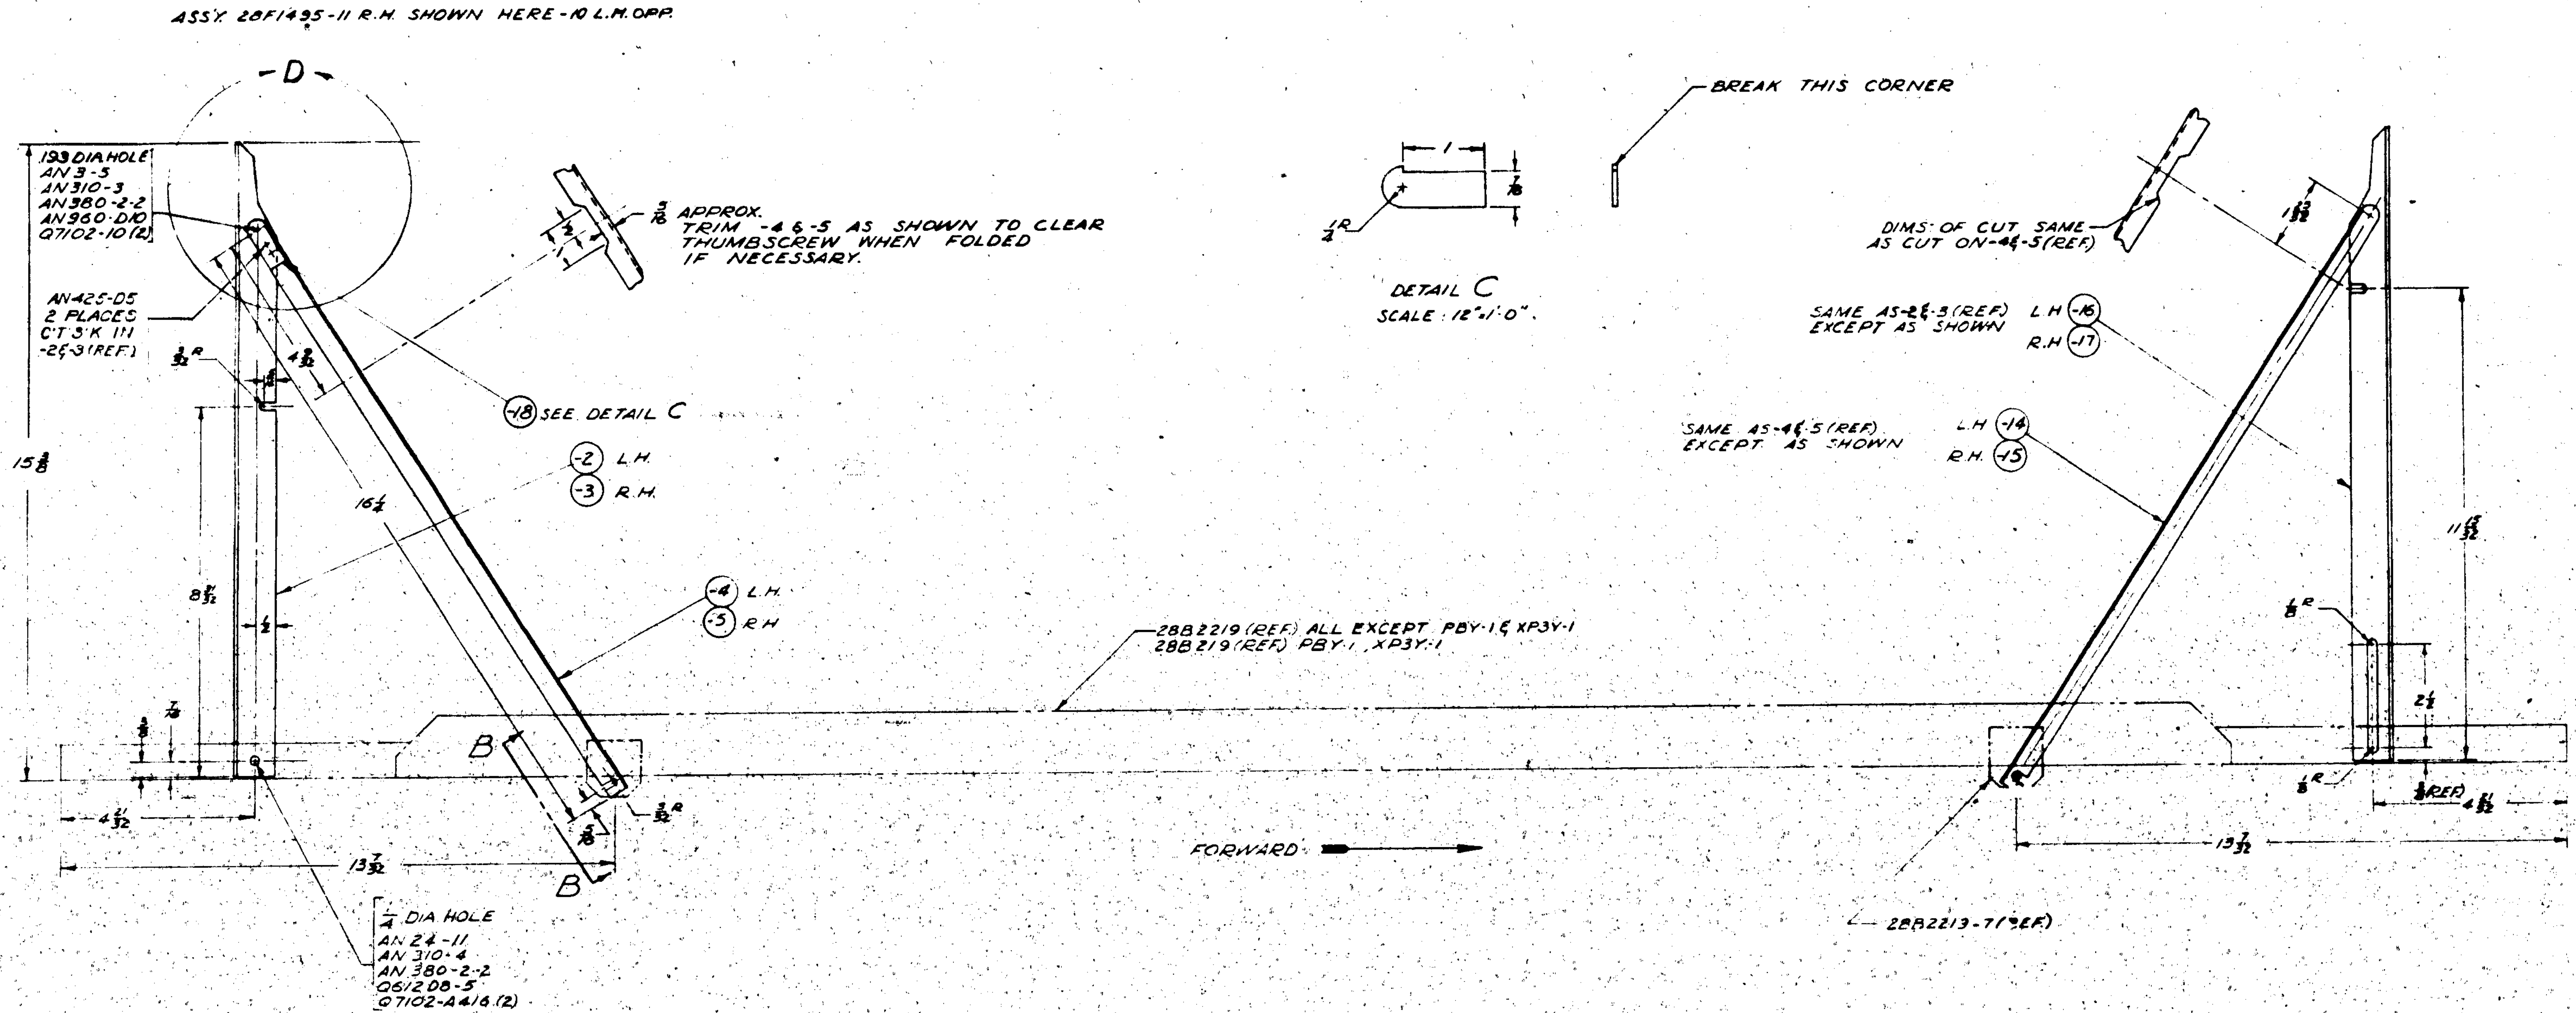

NOTE:
1- ALL BOLTS SCREWS ETC. TO BE INSTALLED AT ASS'Y EXCEPT AN 3-5, AN 310-3, AN 380-2-2 & AN 425-D5.
2- INSERT FABRIC IMPREGNATED WITH BITUMATIC PAINT BETWEEN -2, -3 & -6
3- CUT BACK ALL OUTSTANDING LEGS OF ANGLES AT 45°
4- L.H. ASSEM. FORWARD - 28F1495-12 (REF)
R.H. ASSEM. FORWARD - 28F1495-13 (REF)
L.H. ASSEM. REAR - 28F1495-10 (REF)
R.H. ASSEM. REAR - 28F1495-11 (REF)

FINISH NOTE:
FINISH -2, -3, -4, -5, -14, -15, -16, -17, -18, Z.P-2-GP
FINISH -6 C-P-2GP
FINISH -7 & -8 C.

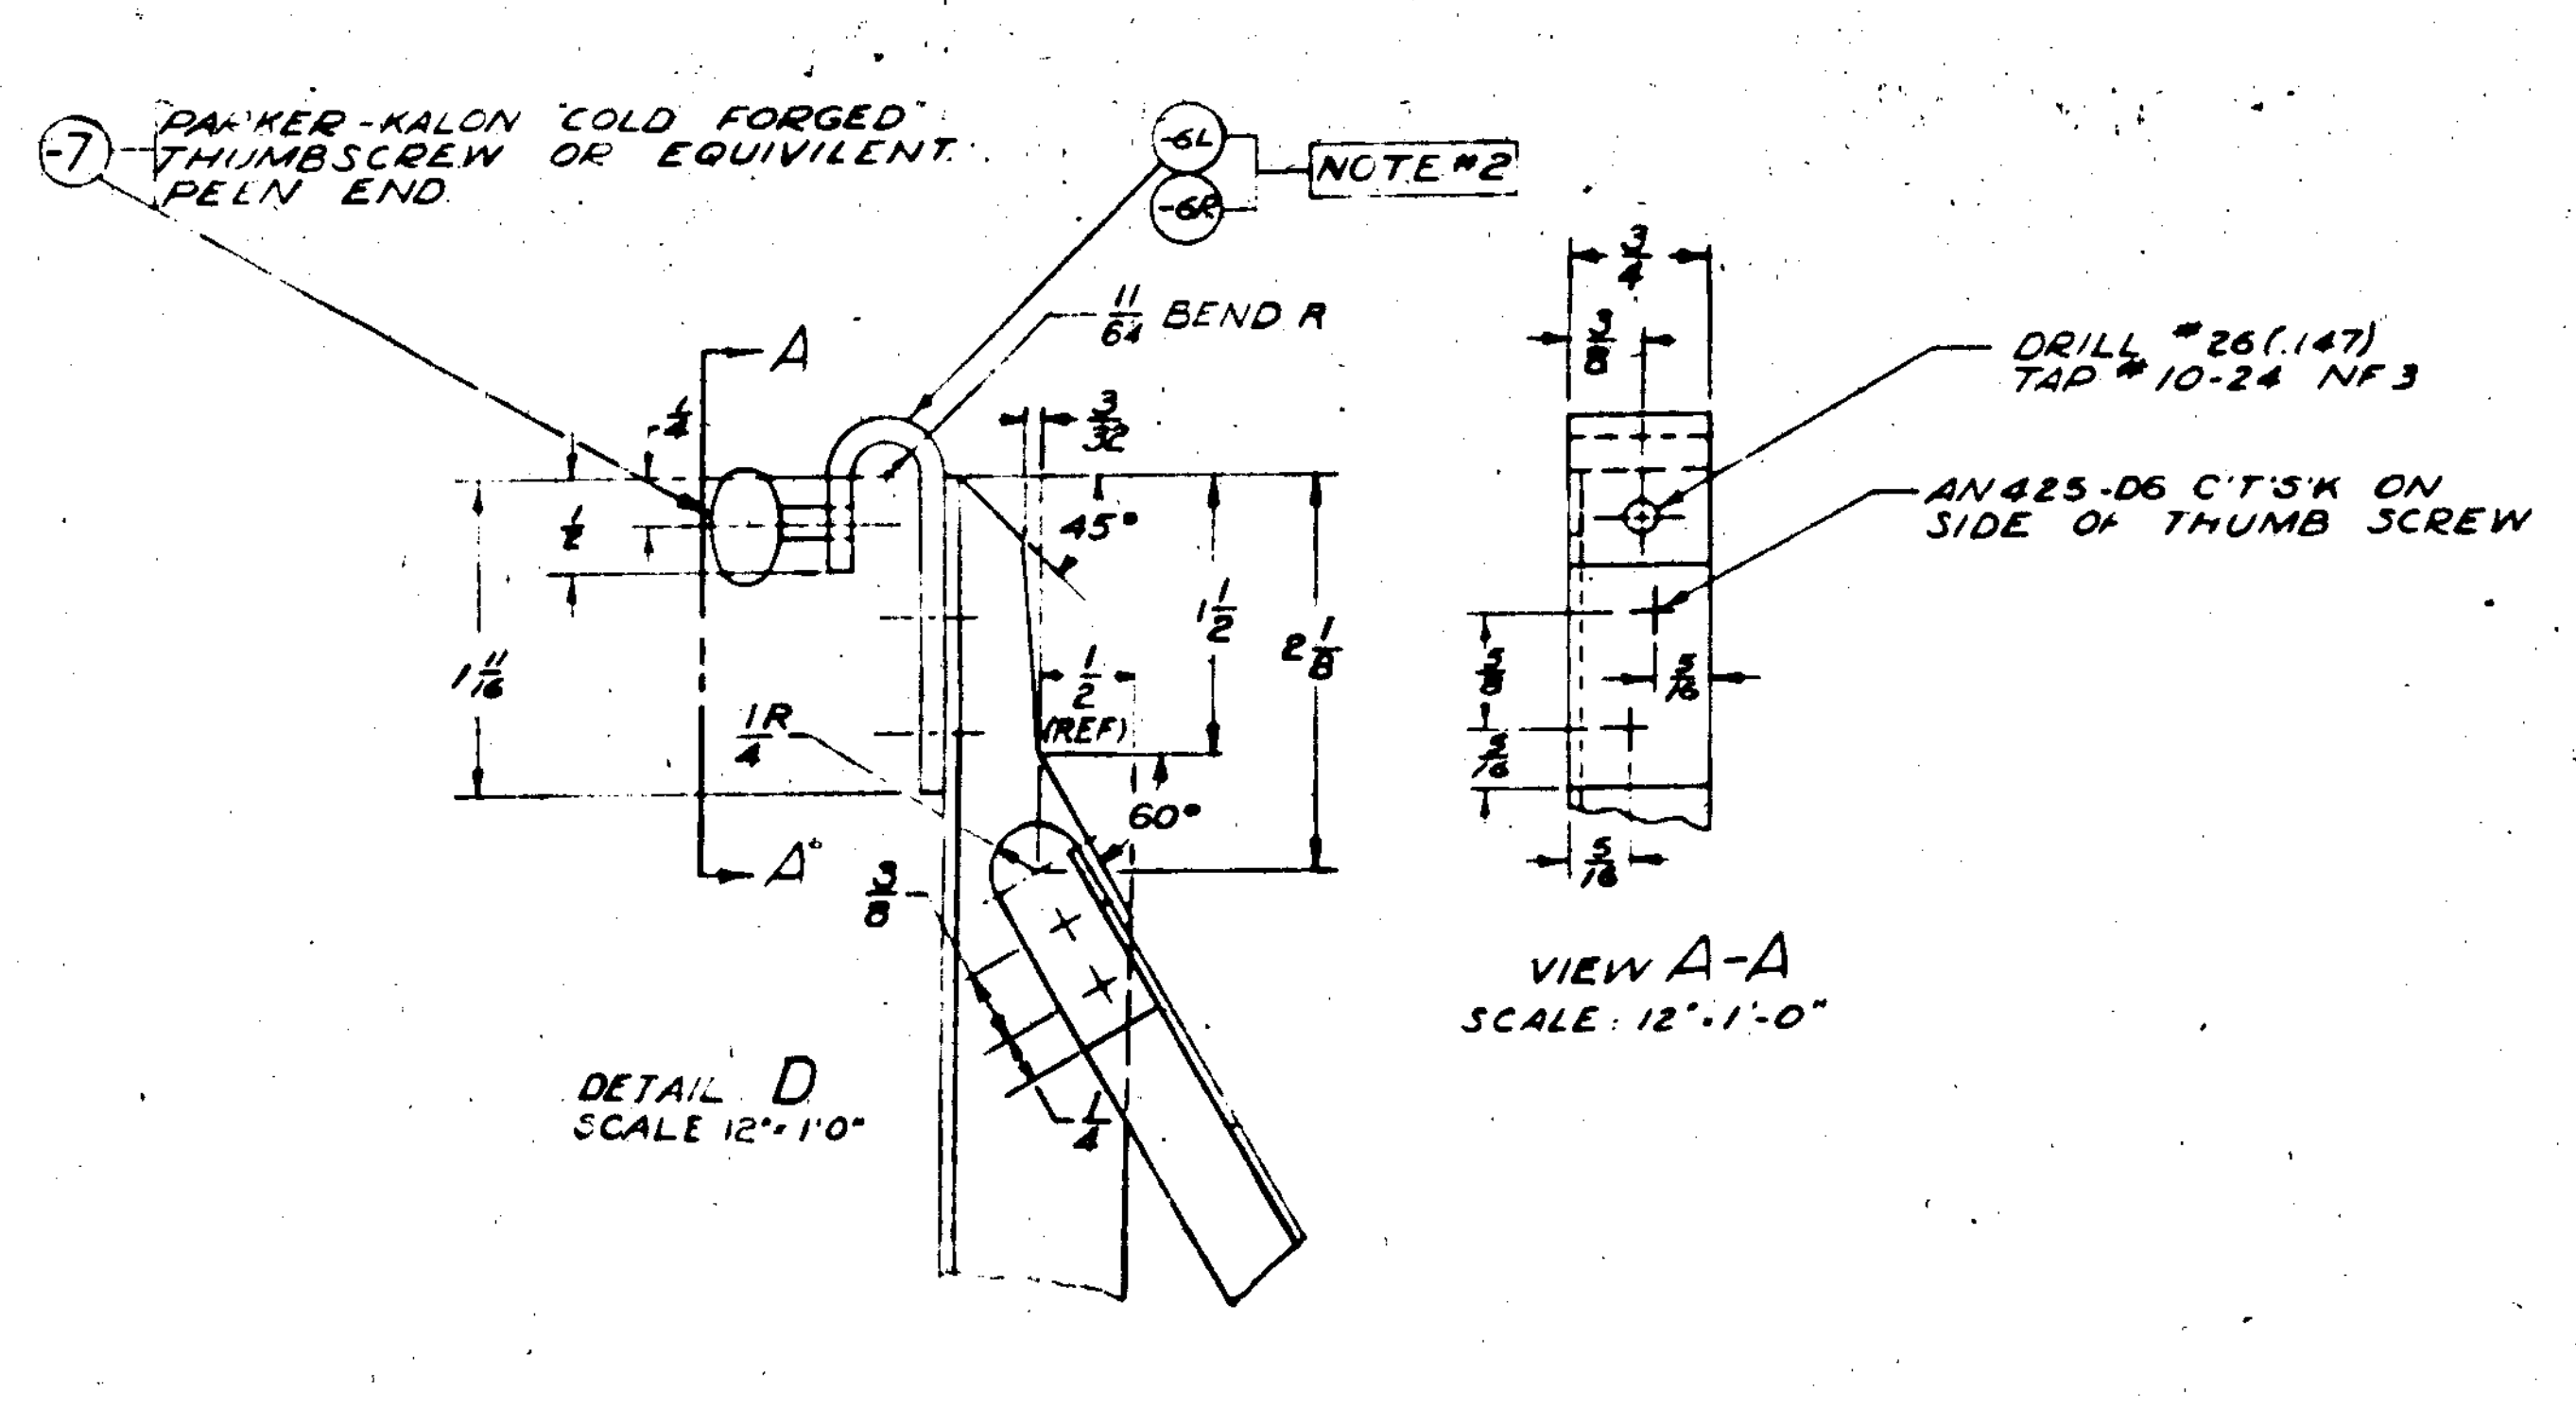

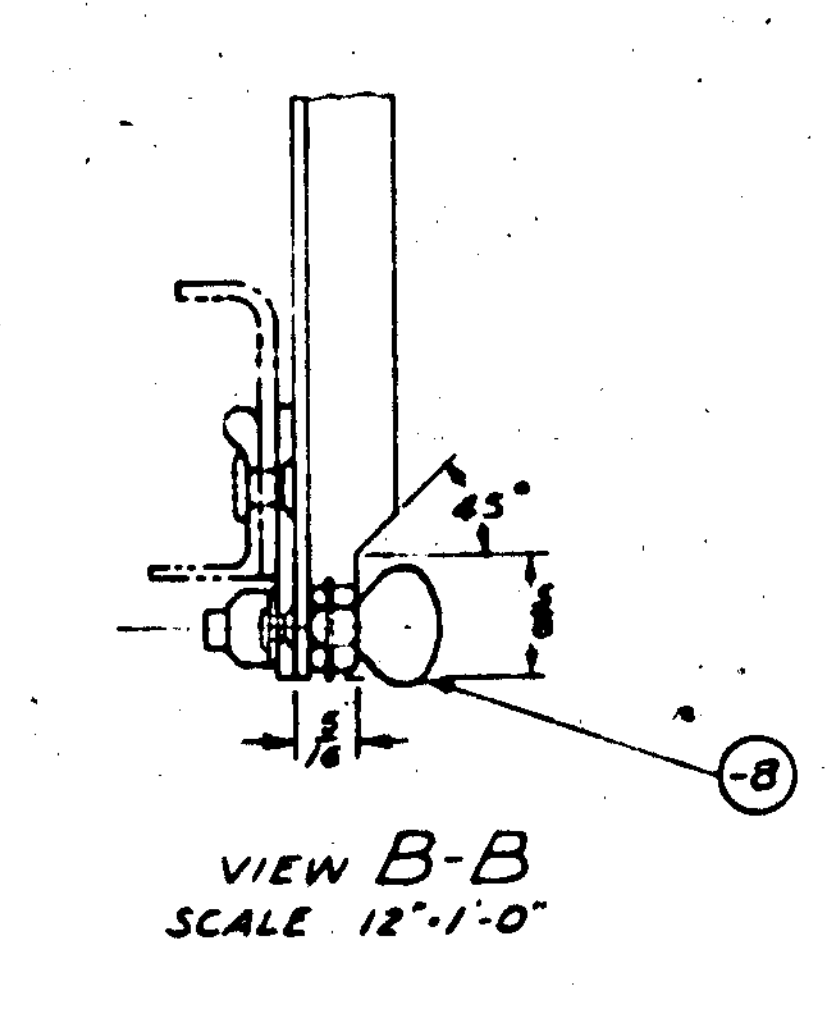

-8 PARKER-KALON "COLD FORGED" THUMBSCREW
AN 315-3R (2) FACE SCREWHEAD TO FIT.
AN 960-316 WASHER - TAKE NUTS UP TIGHT AGAINST SCREWHEAD.
STAKE NUTS TO SCREW 3 PLACES.
INSERT SCREW INTO STOP NUT. PEEN END OVER WELL.
ATTACH STOPNUT BEFORE ASS'Y TO CROSSWALK

PART No.	STOCK	MATERIAL	SPEC.	REQ.
-8	10-32 x 1" (PARKER-KALON STL. THUMBSCREW)			4
-13	SUB-ASS'Y			1
-12	SUB-ASS'Y			1
-11	SUB-ASS'Y			1
-10	SUB-ASS'Y			1

PARTS LIST PER ASSY.

REPLACES 28F1495 6-10-37 | .54 CALC. WT.

SCALE 6"=1'-0" & NOTED

STAMP PART NUMBER WHERE SHOWN

FINISH CODE	
Z	ANODIC TREATMENT
P	PRIMER
C	[illegible]
C	A.M. M. PLATE

H 285

A C		7-10-3[illegible]	RING
NAVY NONE	NOTED		
HEAT TREAT	FINISH	DRAFT / CHECK / STRUCT. / MAT. / APPROV. / ENG.	

NAME BRACKET-FURN. WORK PLATFORM-CROSSWALK

OPP. HAND —

J 28F1495

CONSOLIDATED VULTEE AIRCRAFT CORP. SAN DIEGO DIVISION... SAN DIEGO, CALIF.

R 28F1495